



## FEATURES

- Access panel for easy access to motor
- Swing out outriggers and bent d-rings
- Work light in upper deck
- Toolbox in front of main deck for storage
- All air tanks are located in the wheel area
- Bucket well and open boom trough
- Tapered front beam design



## PAVING EQUIPMENT FRIENDLY

Tapered front beams offer the extremely low load angle of only 4 degrees, just what is needed for the paving industry.


The 42" flip ramps provide extra loading assistance. Load paving machines, rollers and much more with ease.

## OPTIMUM STORAGE SOLUTIONS

A toolbox at the front of main deck provides a nice storage area for chains and other items, while the deep bucket well in the rear provides an area for an excavator bucket to ride safely without detaching the lower boom section. Two pairs of d-rings in the bucket well provide added tie down points.

DESIGNED FOR YOU. BUILT TO LAST.

[www.xlspecializedtrailer.com](http://www.xlspecializedtrailer.com) | 877.283.4852

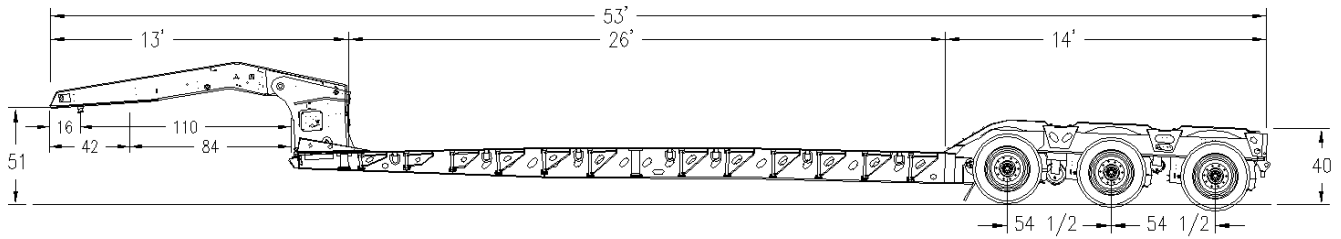

# XL 110 HDG: PAVER STYLE SPECS

## CAPACITY

capacity: 110,000 lb overall  
concentrated: 110,000 lb in 12'

## OVERALL LENGTH & WIDTH

overall length: 53'  
overall width: 102"

## GOOSENECK

13' low-profile style neck  
with relief cut-out  
51" 5th wheel height  
5 position variable ride height  
110" & 84" swing clearance  
16" & 42" king pin setting  
work light

## GOOSENECK OPTIONS

13HP power unit, base of neck,  
dual hydraulics  
toolbox in rear of neck with  
aluminum or steel lid  
steel fenders on side of  
gooseneck  
aluminum fenders on side of  
gooseneck  
registration holder

## MAIN DECK

26' long  
T-1 flange, 80K web  
(4) 16" fabricated i-beams  
paver style tapered beam design  
24" loaded deck height  
8" ground clearance  
10" & 4" stubbed jr. i-beams on  
alternating 12" centers  
42" paver style front flip ramps  
7 bent d-rings per side  
1 3/8" Apitong decking - raised,  
open center  
toolbox in front of deck  
4 flat d-rings in toolbox  
13 chain drops per side  
heavy-duty swing out outriggers  
on 24" centers  
heavy-duty flatback outriggers,  
front and center  
2 flag holders  
bucket well at rear, plate on bottom

4 flat d-rings in bucket well  
front ramp upper flange reinforcement

## MAIN DECK OPTIONS

upper flange reinforcement  
center deck covered  
Oak outrigger planks, 2" x 10"

## REAR DECK

14' long  
32° transition to main deck  
40" loaded deck height  
bolster-style wheel area  
2 chain drops on each bolster  
open boom trough  
2 flat d-rings on main beams at rear  
2 flag holders  
2 stake pockets in tail channel  
for wide load sign  
frame reinforcement for  
1 axle booster

## REAR BRIDGE OPTIONS

removable wheel covers heavy-duty,  
load bearing  
removable wheel covers,  
non-load bearing  
covered boom trough,  
bolt-on bottom plate  
battery back-up with 4-way plug for FA  
prep for power booster  
wide load sign

## SUSPENSION

25,000 lb air ride  
raise and lower valve  
manual ride height control  
liquid filled air gauge

## SUSPENSION OPTIONS

Air-Weigh digital scale

## AXLES

(3) 25,000 lb nominal  
77 1/2" tracking  
54 1/2" axle spacing  
air lift on 3rd axle  
hub pilot, outboard drums  
16 1/2" X 7" brakes  
limit chains on all axles

spring brakes on 1 axle  
ABS not required

## AXLE OPTIONS

hubometer  
dust shields  
cat eye systems

## WHEELS & TIRES

8.25 x 22.5 steel rims  
255 / 70R / 22.5 tires

## WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)  
aluminum mill wheels (outside)  
aluminum polished wheels (outside)

## LIGHTING

12V sealed Grote harness  
rubber mounted LED lights  
2 tail light package with  
aluminum cover  
2 clearance lights per side  
1 mid-turn light per side  
7 pole electric socket

## LIGHTING OPTIONS

amber strobe as 3rd tail light  
additional clearance lights

## PAINT

black, IH red, CAT yellow, XL white  
air & electric done after paint

## PAINT OPTIONS

custom paint colors  
metallic paint colors

## WARRANTY

5 year structural  
1 year paint

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852